


Description	Standard	H20
<b>Specification</b>		
Total Thickness	EN 428	2.0mm
Weight	-	3500g+-50g/sq.m
Length	EN 426	20m
Width	EN 426	2.0m
Dimensional stability	EN 343	≤0.4%
Color fastness	ISO 105-B02	≥6
<b>Parameter</b>		
Type of flooring	EN 649	Homogeneous Sheet
Material	-	Polyvinyl chloride resin
Surface treatment	-	PUR
Installation method	-	Adhere by glue
Flammability	GB 8624-2012	B1
Slip resistance	DIN 51130	R9
Dynamic coefficient of friction	EN 13893	DS
Resistance to staining	EN 423	No Stain
Bend resistance	GB/T 11982-2015	No crack
Antibacterial	ISO 22196	Level 1
Anti iodine	-	Good
Formaldehyde emission	EN 717-1	Class E1
TVOC after 28 days	Ecolabel	<10g/L
<b>Classification</b>		
Domestic	EN 685	23 heavy duty
Commercial	EN 685	34 very heavy duty
Industrial	EN 685	43 extremely heavy duty
<b>Additional Property</b>		
Castor Chair ✓	Electrostatic load ✓	
Underfloor Heating ✓	Chemical Resistance ✓	

# Images. (available stocks)




12501

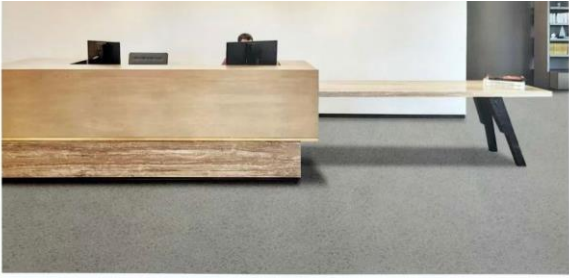

12502




6353-01

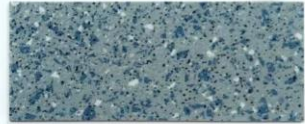

6353-05




12508

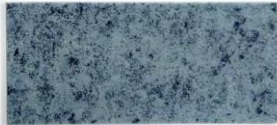

12509



6353-03

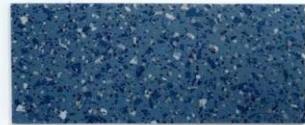


6353-11




12510




12504

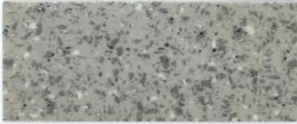

6353-02

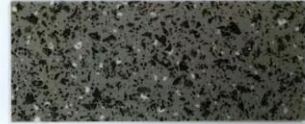

6353-10

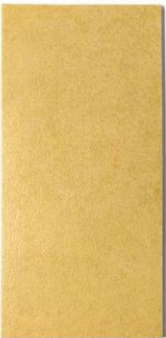

8807



8812



8814



8811



8804



8813



8806



8804



8001



8017



8018



8007



8008




8010



8002



8019



8005



6818



6861



6816



6801



6802



6803



6808



6888



ST29009



ST29010



ST29011



ST29012



ST29005



ST29006



ST29007



ST29008